

Surface-Tension Prediction for Liquid Mixtures

Joel Escobedo and G. Ali Mansoori

University of Illinois at Chicago, Chicago, IL (M/C 063) Chicago, IL 60607-7052 USA

Escobedo and Mansoori (1996) recently proposed a new expression, originally derived from statistical mechanics, for the surface-tension prediction of pure fluids. The theory presented here is extended to mixtures of organic liquids based on the conformal solution theory of mixtures. Using the proposed equation, surface tensions of 55 binary mixtures are predicted within an overall 0.50 AAD%, which is better than other available prediction methods. The 55 binary mixtures are predicted within an overall 2.10 AAD% with a corresponding-states version of the theory. The expressions proposed in this work are general since they have been applied to a variety of binary mixtures, and the results obtained agree well with the experimental data. The proposed model is directly applicable to multicomponent liquid mixtures.

Introduction

The surface tension of a liquid mixture is not a simple function of the surface tensions of the pure liquids. Also, the composition of the bulk phase and the composition at the vapor–liquid interface are not always the same. At the interface, there is migration of the species with the lowest surface tension, or free energy per unit area, at the temperature of the system. This migration at the interface results in a liquid phase rich in the component with the highest surface tension and a vapor phase rich in the component with the lowest surface tension (Teixeira et al., 1992; Croxton, 1986; Carey et al., 1980; Winterfield et al., 1978; Massoudi and King, 1975; Wertheim, 1976). According to Chapela et al. (1977) the more volatile component is adsorbed from the mixture and extends about one atomic diameter into the gas phase beyond the other species.

In most instances the bulk composition is known. However, the composition at the vapor–liquid interface is unknown. Therefore, it is necessary to relate the surface tension of mixtures to bulk-phase concentrations and properties (densities).

In general, there have been several approaches for estimating the surface tension of mixtures (i) based on empirical or semiempirical thermodynamic relations suggested first for pure fluids and (ii) based on statistical mechanical grounds.

Escobedo and Mansoori (1996) recently presented a set of new expressions for predicting the surface tension of pure fluids. These new expressions were developed from the statistical mechanical basis of the Macleod equation. It was shown that their new expressions accurately represent the surface

tension of a variety of pure fluids over a wide range of temperatures. In this article, the expressions proposed originally by Escobedo and Mansoori (1996) are extended to the case of mixtures.

Theory

For the surface tension σ of pure organic fluids Escobedo and Mansoori (1996) proposed

$$\sigma = [\mathcal{P}(\rho_l - \rho_v)]^4 \quad (1)$$

$$\mathcal{P} = \mathcal{P}_0(1 - T_r)^{0.37} T_r \exp(0.30066/T_r + 0.86442T_r^9) \quad (2)$$

where \mathcal{P} is known as parachor, ρ_l is the liquid density, ρ_v is the vapor density, T_r is the reduced temperature, and \mathcal{P}_0 is a constant that is a function of the molecular characteristics under consideration. This new expression, derived from statistical mechanics, represents the experimental surface tension of 94 different organic compounds within 1.05 average absolute percent deviation (AAD%). In addition,

$$\mathcal{P}_0 = 39.6431[0.22217 - 2.91042 \times 10^{-3}(\mathcal{R}^*/T_{br}^2)]T_c^{13/12}/P_c^{5/6} \quad (3)$$

was proposed as a corresponding-states expression for the temperature-independent, compound-dependent parameter \mathcal{P}_0 . In this equation, $\mathcal{R}^* = \mathcal{R}_m/\mathcal{R}_{m,\text{ref}}$, \mathcal{R}_m is the molar refraction given by $R_m = (4\pi N_A/3)[\alpha + \mu^2 f(T)] = (1/\rho)(n^2 - 1)/(n^2 + 2)$, α and μ are the polarizability and the dipole

Correspondence concerning this article should be addressed to G. A. Mansoori.

moment of the molecule, N_A is Avogadro's number, n is the sodium-D light refractive index of a liquid at 20°C, and $\mathfrak{R}_{m,\text{ref}} = 6.987$ is the molar refraction of the reference fluid (methane). When this generalized expression is used, surface tensions for the 94 pure compounds can be predicted within an overall 2.57 AAD% at all temperatures investigated.

Exact statistical mechanical extension of Eqs. 1–3 to mixtures results in quite complex expressions. However, using the principles of the conformal solution theory (Massih and Mansoori, 1983), the conclusion is the following generalization of Eq. 2 for the case of mixtures,

$$\sigma_m = \left[(1 - T_{r,m})^{0.37} T_{r,m} \exp(0.30066/T_{r,m} + 0.86442 T_{r,m}^9) \right. \\ \left. \times (\mathfrak{P}_{0,m}^L \rho_{L,m} - \mathfrak{P}_{0,m}^V \rho_{v,m}) \right]^4 \quad (4)$$

where σ_m is the surface tension of the mixture; $\mathfrak{P}_{0,m}^L$ and $\mathfrak{P}_{0,m}^V$ are the temperature-independent conformal parameters for the liquid phase and vapor phase, respectively; $T_{r,m}$ is the pseudoreduced temperature for the mixture (i.e., $T_{r,m} = T/T_{c,m}$); $T_{c,m}$ is the pseudocritical temperature of the liquid mixture; and $\rho_{L,m}$ and $\rho_{v,m}$ are the equilibrium densities of the liquid phase and vapor phase, respectively. The aim of this report is to apply Eq. 4 for the prediction of the surface tension of mixtures over the whole concentration range from the temperature-independent parameter \mathfrak{P}_0 for the pure components. In order to apply Eq. 4 to mixtures we need the following:

(1) Accurate prediction of phase equilibrium properties (composition of the liquid and vapor phases, vapor and liquid densities, and saturation pressures).

(2) Mixing rules for the temperature-independent parameter \mathfrak{P}_0 in order to calculate the temperature-independent parameters $\mathfrak{P}_{0,m}^L$ and $\mathfrak{P}_{0,m}^V$ for the liquid- and vapor-phase mixtures.

Prediction of Phase Equilibrium Properties

In this work, the equilibrium properties for a multicomponent mixture were calculated in two steps.

First, the Peng-Robinson (PR) equation of state was used to predict the vapor pressure and liquid- and vapor-phase compositions. The PR equation of state was selected for this purpose because its parameters are known for many pure compounds and because its interaction parameters are available for numerous binary mixtures. Since the constants of the PR equation are fitted to vapor pressure data it is reliable for vapor–liquid equilibrium (VLE) calculations.

Second, the predicted compositions and vapor pressure by the PR equation were in turn used with the Riazi-Mansoori equation of state (RM EOS) to predict the densities of the liquid and vapor phases. The RM EOS yields much more accurate density predictions than the PR equation.

The calculations described above have been incorporated into a comprehensive computer package for vapor–liquid equilibrium (VLE) calculations. This computer package has been used to perform the routine bubble-point and flash calculations.

The PR equation of state is given by

$$P = RT/(V - b) - a\alpha/(V^2 + 2bV - b^2) \quad (5)$$

where P , T , and $V = 1/\rho$ are pressure, temperature, and molar volume, respectively; R is the universal gas constant; $a = 0.45724 R^2 T_c^2 / P_c$; $b = 0.07780 RT_c / P_c$; T_c is the critical temperature; P_c is the critical pressure; $\alpha = [1 + (0.37464 + 1.5422\omega - 0.26992\omega^2)(1 - T_r^{0.5})]^2$; ω is the acentric factor; and $T_r = T/T_c$ is the reduced temperature. The mixing rules for the temperature-dependent term ($a\alpha$) and constant b are given by: $(a\alpha)_m = \sum \sum [x_i x_j (a\alpha)_{ij}]$ and $b_m = \sum (x_i b_i)$, respectively; $(a\alpha)_m$ is the temperature-dependent parameter for the mixture; b_m is the volume-related constant for the mixture; and x_i is the mole fraction of species i in the mixture. The cross-parameters are calculated using the expression $(a\alpha)_{ij} = (1 - k_{ij})(a\alpha)_i (a\alpha)_j^{1/2}$; where k_{ij} is a binary interaction parameter. This interaction parameter is calculated using a correlation recently proposed by Gao (1992): $(1 - k_{ij}^{PR}) = [2(T_{c_i} T_{c_j})^{1/2} / (T_{c_i} + T_{c_j})]^{Z_{c_{ij}}}$; $Z_{c_{ij}} = [(Z_{c_i} + Z_{c_j})/2]$; where Z_{c_i} is the critical compressibility factor for pure component i .

Bubble-point and flash calculations are performed using the above equation of state following the standard algorithms reported in textbooks (Walas, 1985). The predicted saturation pressure and vapor- and liquid-phase compositions are then used along with the RM EOS to calculate the equilibrium densities for the vapor and liquid phases. The RM EOS is given below,

$$P = \rho RT / (1 - b\rho) - a\rho^2 / [T^{1/2} \cdot (1 + b\rho)] \quad (6)$$

$$a = 0.42728 R^2 T_c^{2.5} / P_c \quad \text{and}$$

$$b = (0.08664 RT_c / P_c) \cdot \delta (\mathfrak{R}^*, T_r)$$

$$\delta^{-1} = 1 + \{0.02[1 - 0.92 \exp(-1,000|T_r - 1|)]$$

$$- 0.035(T_r - 1)\} (\mathfrak{R}^* - 1)$$

$$\mathfrak{R}^* = \mathfrak{R}_m / \mathfrak{R}_{m,\text{ref}};$$

$$\mathfrak{R}_m = (4\pi N_A / 3) [\alpha + \mu^2 f(T)] = (1/\rho)(n^2 - 1)/(n^2 + 2);$$

$$\mathfrak{R}_{m,\text{ref}} = 6.987$$

where ρ is the molar density; T , P , T_c , P_c , T_r , and R are as previously defined; \mathfrak{R}_m is the molar refraction; $\mathfrak{R}_{m,\text{ref}}$ is the molar refraction of the reference compound (methane); α and μ are the polarizability and the dipole moment of the molecule; N_A is Avogadro's number; and n is the sodium-D light refractive index of a liquid at 20°C (Riazi and Mansoori, 1993).

In order to apply Eq. 6 to the case of mixtures the van der Waals mixing rules and the molecular expressions for the cross-parameters (Riazi and Mansoori, 1993) have been used

$$T_{c_m} = \frac{\sum_i \sum_j [x_i x_j (T_{c_{ij}}^2 / P_{c_{ij}})]}{\sum_i \sum_j [x_i x_j (T_{c_{ij}} / P_{c_{ij}})]} \quad (6a)$$

$$T_{c_{ij}} = (1 - k_{ij}^{RM}) (T_{c_i} T_{c_j})^{1/2} \quad (6b)$$

$$P_{c_m} = \frac{\sum_i \sum_j [x_i x_j (T_{c_{ij}}^2 / P_{c_{ij}})]}{\left\{ \sum_i \sum_j [x_i x_j (T_{c_{ij}} / P_{c_{ij}})] \right\}^2} \quad (6c)$$

$$P_{c_{ij}} = 8 T_{c_{ij}} \left[(T_{c_{ij}} / P_{c_{ij}})^{1/3} + (T_{c_{ij}} / P_{c_{ij}})^{1/3} \right]^3 \quad (6d)$$

$$\mathcal{R}_m^* = \sum_i \sum_j (x_i x_j \mathcal{R}_{ij}^*) \quad (6e)$$

$$\mathcal{R}_{ij}^* = \left[\mathcal{R}_{ii}^{*1/3} + \mathcal{R}_{jj}^{*1/3} \right]^3 / 8 \quad (6f)$$

In these equations, $T_{c,m}$ is the pseudocritical temperature of the mixture; $T_{c,i}$ is the critical temperature of pure component i in the mixture; $P_{c,m}$ is the pseudocritical pressure of the mixture; $P_{c,i}$ is the critical pressure of pure component i in the mixture; $P_{c,ij}$ is a cross-parameter for pressure; k_{ij}^{RM} is the binary interaction parameter (RM stands for Riazi-Mansoori to differentiate it from the interaction parameter used in the PR equation of state); \mathcal{R}_m^* is the dimensionless molar refraction of the mixture; \mathcal{R}_i^* is the dimensionless molar refraction of pure component i in the mixture; and x_i is the mole fraction of component i in the mixture. The binary interaction parameter, k_{ij}^{RM} , is calculated using the following expression

$$(1 - k_{ij}^{RM}) = (1 - k_{ij}^{PR}) \left\{ 8 \left[(T_{c,ii}/P_{c,ii})(T_{c,ij}/P_{c,ij}) \right]^{1/2} / \left[(T_{c,ii}/P_{c,ii})^{1/3} + (T_{c,ij}/P_{c,ij})^{1/3} \right]^3 \right\} \quad (6g)$$

Mixing Rules for the Temperature-Independent Parameter \mathcal{P}_0

This section is devoted to developing the mixing rules for the temperature-independent parameter \mathcal{P}_0 . These mixing rules may be derived considering the proportionality of \mathcal{P}_0 to the intermolecular parameters (or critical properties) according to Kwak and Mansoori (1986). Following the principle of corresponding states a reduced surface tension may be defined as $\sigma_r = \sigma / [P_c^{2/3}(kT_c)^{1/3}]$ and expected to be a universal function of $T_r = T/T_c$ (i.e., the reduced temperature). Thus, it can be shown that,

$$\mathcal{P}_{0,ii} \propto T_{c,ii}^{13/12} / P_{c,ii}^{5/6} \quad (7)$$

It may be assumed that the temperature-independent parameter $\mathcal{P}_{0,m}$ for the mixture will follow the same proportionality with respect to the pseudocritical temperature and pseudocritical pressure of the mixture,

$$\mathcal{P}_{0,m} \propto T_{c,m}^{13/12} / P_{c,m}^{5/6} \quad (8)$$

where $T_{c,m}$ and $P_{c,m}$ are the pseudocritical temperature and pressure for the mixture, respectively. Introducing the van der Waals mixing rules for $T_{c,m}$ and $P_{c,m}$, Eqs. 6a and 6c, into Eq. 8 the following expression is obtained,

$$\mathcal{P}_{0,m} \propto \left\{ \frac{\sum_i \sum_j (x_i x_j T_{c,ij}^2 / P_{c,ij})}{\sum_i \sum_j (x_i x_j T_{c,ij} / P_{c,ij})} \right\}^{13/12} / \left\{ \frac{\sum_i \sum_j (x_i x_j T_{c,ij}^2 / P_{c,ij})}{\left[\sum_i \sum_j (x_i x_j T_{c,ij} / P_{c,ij}) \right]^2} \right\}^{5/6} \quad (9)$$

this equation may be further reduced to the following expression

$$\mathcal{P}_{0,m} \propto \left[\sum_i \sum_j x_i x_j (T_{c,ij}^2 / P_{c,ij}) \right]^{1/4} \left[\sum_i \sum_j x_i x_j (T_{c,ij} / P_{c,ij}) \right]^{7/12} \quad (10)$$

and the term $T_{c,ij}^2 / P_{c,ij}$ may be written as

$$T_{c,ij}^2 / P_{c,ij} = (T_{c,ij}^{11/12} / P_{c,ij}^{1/6}) (T_{c,ij}^{13/12} / P_{c,ij}^{5/6}) \quad (11)$$

Notice that the term within the second parentheses on the righthand side of Eq. 11 is proportional to $\mathcal{P}_{0,ij}$ given by Eq. 7. Thus, Eq. 11 may be rewritten as follows

$$T_{c,ij}^2 / P_{c,ij} \propto (T_{c,ij}^{11/12} / P_{c,ij}^{1/6}) \mathcal{P}_{0,ij} \quad (12)$$

Eq. 12 can further be rearranged as follows

$$T_{c,ij}^2 / P_{c,ij} = (P_{c,ij} / T_{c,ij})^{7/3} \mathcal{P}_{0,ij}^4 \quad (13)$$

By introducing Eq. 13 back into Eq. 10 the following expression for $\mathcal{P}_{0,m}$ is obtained

$$\mathcal{P}_{0,m} = \left[\sum_i \sum_j x_i x_j (P_{c,ij} / T_{c,ij})^{7/3} \mathcal{P}_{0,ij}^4 \right]^{1/4} \times \left[\sum_i \sum_j x_i x_j (T_{c,ij} / P_{c,ij}) \right]^{7/12} \quad (14)$$

Eq. 14 represents the general van der Waals mixing rule proposed in this work for calculation of the temperature-independent parameter, $\mathcal{P}_{0,m}$, for a multicomponent mixture. The cross-parameters may be calculated using the following expression

$$\mathcal{P}_{0,ij} = (1 - m_{ij}) (\mathcal{P}_{0,ii} \cdot \mathcal{P}_{0,jj})^{1/2} \quad (15)$$

where m_{ij} is a binary interaction parameter. The cross-parameters for temperature and pressure in Eq. 14 may be calculated using Eqs. 6b and 6d, respectively.

For the case of binary mixtures, the equations to calculate the temperature-independent parameters, $\mathcal{P}_{0,m}^L$ and $\mathcal{P}_{0,m}^V$, for the liquid and vapor phases are the following

$$\mathcal{P}_{0,m}^L = \left[x_{11}^2 (P_{c,11} / T_{c,11})^{7/3} \mathcal{P}_{0,11}^4 + x_{22}^2 (P_{c,22} / T_{c,22})^{7/3} \mathcal{P}_{0,22}^4 + 2x_1 x_2 (P_{c,12} / T_{c,12})^{7/3} \mathcal{P}_{0,12}^4 \right]^{1/4} \times \left[x_{11}^2 (T_{c,11} / P_{c,11}) + x_{22}^2 (T_{c,22} / P_{c,22}) + 2x_1 x_2 (T_{c,12} / P_{c,12}) \right]^{7/12} \quad (16)$$

The temperature-independent parameter \mathcal{P}_0^V for the vapor-phase mixture is calculated by replacing the x_i s in Eq. 16 by the compositions of the vapor phase (y_i s). The cross-param-

ters are then given by,

$$\Phi_{0,12} = (1 - m_{12})(\Phi_{0,1} \cdot \Phi_{0,2})^{1/2} \quad (16a)$$

$$T_{c_{12}} = (1 - k_{12}^{RM})(T_{c_1} T_{c_2})^{1/2} \quad (16b)$$

$$P_{c_{12}} = 8T_{c_{12}} \left[(T_{c_1}/P_{c_1})^{1/3} + (T_{c_2}/P_{c_2})^{1/3} \right]^3 \quad (16c)$$

Eq. 16 may be used along with Eq. 4 to predict the surface tension of binary mixtures. In the following sections the results for 55 binary mixtures are reported. Table 1 shows the physical properties of the pure fluids involved in these binary mixtures.

The most widely used mixing rules for the temperature-independent parameter, Φ_0 , in Eq. 4 were proposed by Weinaug and Katz (1943) as follows

$$\Phi_{0,m} = \sum(x_i \Phi_{0,i}) \quad (17)$$

Because of the wide application of this mixing rule, it was decided to investigate the results obtained with Eq. 4 and this mixing rule as a preliminary step. Thus, the surface tensions of all 55 binary mixtures were predicted using the following procedure (Case 1):

(a) The temperature-independent parameter Φ_0 for the pure compounds was obtained by fitting Eq. 1 to the experimental surface tension for the pure compounds.

(b) Routine VLE calculations were performed using a computer package developed in our laboratory to obtain the vapor- and liquid-phase compositions as well as the saturation pressure. The results from the VLE calculations were used along with the RM EOS to predict the vapor and liquid densities.

(c) Finally, Eqs. 4 and 17 were used to predict the surface tension for the mixture.

The results obtained for this case 1 are reported in Table 2. Note that the surface tension of all 55 sets of binary-mixture data can be predicted with an overall 2.64 AAD%.

Surface-Tension Prediction for Binary Mixtures

As mentioned earlier, Eqs. 4, 16, and 16a–16c, proposed in this work, represent the necessary expressions to predict the surface tension of binary liquid mixtures. These expressions relate the surface tension of the mixture to the bulk properties of the system such as the vapor- and liquid-phase compositions and vapor- and liquid-phase densities. Therefore, only the temperature-independent parameter Φ_0 for the pure components is needed. This parameter can be obtained by fitting Eq. 1 to the experimental surface-tension data for the pure fluids. It may also be predicted using the corresponding-states expression given in Eq. 3.

In this work, we predict the surface tension for 55 binary mixtures and compare the results against the experimental data for these systems. The selected systems represent a wide variety of binary mixtures. The interaction parameter, m_{ij} , appearing in Eq. 15 has been treated as an adjustable parameter for all the mixtures investigated.

The surface tension for all the binary mixtures was predicted following the procedure outlined below,

Table 1. Properties of the Pure Fluids Involved in the 55 Binary Mixtures

Compound	T_c	P_c	Z_c	ω	α^*	T_b
Acetone	508.1	47	0.232	0.304	2.316	329.2
Acetonitrile	545.5	48.3	0.184	0.321	1.585	354.8
Benzene	562.2	48.9	0.271	0.212	3.748	353.2
Carbon disulfide	552	79	0.276	0.109	3.079	319
Carbon tetrachloride	556.4	49.6	0.272	0.193	3.784	349.9
Chloroform	536.4	53.7	0.293	0.218	3.071	334.3
Cyclopentane	511.7	45.1	0.275	0.196	3.310	322.4
Cyclohexane	553.5	40.7	0.273	0.212	3.966	353.8
Cis-Decalin	702.3	32	0.245	0.286	6.281	468.9
Trans-Decalin	687.1	31.4	0.245	0.270	6.341	460.5
n-Decane	617.7	21.2	0.249	0.489	6.915	447.3
Dichloromethane	510	63	0.265	0.1916	2.339	313
n-Dodecane	658.2	18.2	0.240	0.575	8.269	489.5
Ethyl acetate	523.2	38.3	0.252	0.362	3.186	350.3
Ethyl ether	466.7	36.4	0.262	0.281	3.219	307.6
n-Hexane	507.5	30.1	0.264	0.299	4.281	341.9
Iodomethane	528	65.9	N/A	0.1493	2.788	315.7
Iso-Octane	544	25.7	0.266	0.303	5.619	372.4
Nitromethane	588	63.1	0.208	0.310	1.787	374.3
Phenol	694.2	61.3	0.240	0.438	4.001	455
Tetrachloroethylene	620.2	47.6	0.250	0.254	4.341	394.4
Toluene	591.8	41	0.263	0.263	4.450	383.8
o-Xylene	630.3	37.3	0.262	0.310	5.124	417.6

Critical properties and acentric factor were obtained from Reid et al. (1986). The parameter Φ_0 was obtained from experimental surface tension data for pure components. The dimensionless molar refraction α^* was obtained from data for molar refraction reported by Hall (1986) or calculated using the Lorentz-Lorenz function. For iodomethane, the acentric factor was estimated by predicting the vapor pressure at $T_r = 0.7$ using the Antoine equation for vapor pressure prediction. The constants for this equation were obtained from Hall (1986). For iodomethane there was no experimental critical compressibility factor.

(1) The temperature-independent parameters Φ_0 for the pure compounds were obtained in two ways: case 2 by fitting Eq. 1 to the experimental surface tension for the pure compounds; and case 3 by predicting them using Eq. 3.

(2) VLE calculations were performed using a computer package developed according to what was discussed above to obtain the vapor- and liquid-phase compositions as well as the saturation pressure. The results from the VLE calculations were used along with RMEOS to predict the equilibrium vapor and liquid densities.

(3) Finally, Eqs. 4, 16, and 16a–16c were used to predict the surface tension for the mixture.

The results obtained for these two cases are also reported in Table 2. It must be pointed out that the interaction parameters m_{ij} in case 2 and case 3 are different. Therefore, a different value for each case is reported in Table 2.

Results and Discussion for Binary Mixtures

Table 2 contains the results obtained for cases 1, 2, and 3. This table also reports temperature, experimental data reference, and number of data points for each binary mixture.

Case 2

The AAD% obtained when the binary interaction parameter (m_{ij}) was set equal to zero is reported. Note that the

Table 2. Results Obtained for the 55 Sets of Binary Mixtures Investigated in this Work

Binary System	Case 2				Case 3			T (K)	Ref.	No. of Data
	Case 1 AAD%	AAD% $m_{ij} = 0$	Fitted m_{ij}	AAD%	AAD% $m_{ij} = 0$	Fitted m_{ij}	AAD%			
Acetone–Chloroform	0.42	0.48	0.0050	0.09	1.69	-0.0095	0.94	291.15	A	5
Acetone–Carbon disulfide	3.06	1.42	0.0157	0.21	3.13	-0.0087	2.31	288.15	A	5
Acetone–Phenol	3.64	3.64	0.0305	1.72	10.24	0.0717	3.13	293.15	A	5
Benzene–Acetone	0.75	0.69	-0.0061	0.29	5.61	-0.0326	2.24	298.15	B	9
Benzene–Carbon tetrachloride	0.22	0.22	0.0000	0.22	1.98	-0.0064	1.67	298.15	B	11
Benzene–Carbon disulfide	2.77	0.31	0.0035	0.16	1.94	0.0000	1.94	291.15	A	11
Benzene–Ethyl acetate	1.00	0.69	0.0060	0.13	6.35	-0.0346	2.79	298.15	B	11
Benzene–Ethyl ether	2.46	2.36	0.0202	0.44	2.21	0.0150	1.19	291.15	A	5
Benzene– <i>n</i> -Dodecane	1.74	6.17	-0.0705	0.70	7.06	-0.0659	0.96	298.15	C	5
Benzene– <i>n</i> -Dodecane	2.37	4.79	-0.0705	1.72	6.16	-0.0659	1.06	303.15	C	5
Benzene– <i>n</i> -Dodecane	1.78	4.94	-0.0705	1.30	6.01	-0.0659	1.08	308.15	C	5
Benzene– <i>n</i> -Dodecane	2.07	6.06	-0.0705	1.05	6.88	-0.0659	0.71	313.15	C	5
Benzene– <i>n</i> -Hexane	4.04	3.11	0.0275	0.97	2.16	0.0140	1.12	298.15	C	7
Benzene– <i>n</i> -Hexane	3.70	2.86	0.0275	0.39	2.36	0.0140	1.04	303.15	C	5
Benzene– <i>n</i> -Hexane	3.86	2.93	0.0275	0.69	2.38	0.0140	1.01	308.15	C	5
Benzene– <i>n</i> -Hexane	3.18	2.39	0.0275	0.63	1.80	0.0140	1.04	313.15	C	5
Benzene–Nitromethane	3.47	3.69	0.0220	1.13	2.84	0.0059	2.82	298.15	A	6
Benzene– <i>o</i> -Xylene	0.45	0.73	-0.0060	0.05	2.40	-0.0143	0.73	298.15	D	10
Benzene–Phenol	3.50	3.52	0.0338	0.28	10.67	0.0672	4.38	308.15	A	5
Carbon tetrachloride–Ethyl acetate	0.69	0.50	0.0020	0.45	4.87	-0.0232	2.73	298.15	B	11
Carbon disulfide–Carbon tetrachloride	2.55	0.76	0.0077	0.31	4.37	0.0296	1.45	293.15	E	10
Carbon disulfide–Carbon tetrachloride	2.57	0.75	0.0077	0.25	4.39	0.0296	1.40	298.15	E	10
Carbon disulfide–Carbon tetrachloride	2.76	0.94	0.0077	0.21	4.52	0.0296	1.43	303.15	E	10
Carbon disulfide–Carbon tetrachloride	2.81	0.98	0.0077	0.23	4.56	0.0296	1.49	308.15	E	10
Carbon disulfide–Carbon tetrachloride	2.75	0.92	0.0077	0.30	4.47	0.0296	1.42	313.15	E	10
Carbon disulfide–Carbon tetrachloride	2.91	1.08	0.0077	0.41	4.59	0.0296	1.43	318.15	E	10
Carbon disulfide–Benzene	3.56	1.29	0.0073	0.53	3.08	0.0065	2.95	298.15	B	6
Cyclopentane–Carbon tetrachloride	0.29	0.31	0.0033	0.10	1.61	0.0083	0.96	298.15	D	10
Cyclopentane–Benzene	2.42	2.42	0.0182	0.19	1.31	0.0070	0.77	298.15	D	11
Cyclopentane–Toluene	1.88	1.27	0.0099	0.12	0.62	0.0035	0.44	298.15	D	12
Cyclopentane–Tetrachloroethylene	2.01	1.84	0.0151	0.19	2.06	0.0159	0.68	298.15	D	11
Cyclohexane–Benzene	2.36	1.99	0.0169	0.14	0.82	0.0026	0.64	293.15	D	11
Cyclohexane–Benzene	1.98	1.77	0.0169	0.31	1.00	0.0026	0.98	303.15	D	11
Cyclohexane– <i>cis</i> -Decalin	0.67	1.12	-0.0102	0.12	3.70	-0.0219	1.27	298.15	D	11
Cyclohexane– <i>trans</i> -Decalin	0.31	1.38	-0.0113	0.11	1.76	-0.0121	0.37	298.15	D	11
Cyclohexane–Tetrachloroethylene	1.95	1.94	0.0152	0.16	1.89	0.0134	0.80	298.15	D	11
Cyclohexane–Toluene	1.93	1.86	0.0152	0.14	0.90	0.0055	0.61	298.15	D	13
Ethyl ether–Carbon disulfide	5.27	2.49	0.0183	1.87	5.19	0.0459	4.03	291.15	A	6
Iodomethane–Carbon tetrachloride	2.15	1.72	0.0118	0.99	2.90	0.0036	2.77	288.15	F	5
Iodomethane–Carbon tetrachloride	2.65	2.15	0.0118	0.65	2.73	0.0036	2.60	293.15	F	8
Iodomethane–Carbon tetrachloride	2.57	1.93	0.0118	0.51	2.34	0.0036	2.34	298.15	F	14
Iodomethane–Carbon tetrachloride	2.64	1.99	0.0118	0.48	2.50	0.0036	2.47	303.15	F	11
Iodomethane–Carbon tetrachloride	2.37	1.80	0.0118	0.37	3.08	0.0036	3.21	308.15	F	9
<i>Iso</i> -Octane–Benzene	3.55	1.18	0.0096	0.58	3.00	0.0169	1.42	303.15	G	9
<i>Iso</i> -Octane–Cyclohexane	1.08	0.24	0.0000	0.24	2.50	0.0101	1.50	303.15	G	5
<i>Iso</i> -Octane– <i>n</i> -Dodecane	1.16	1.59	-0.0147	0.29	1.53	-0.0050	1.45	303.15	G	9
Acetonitrile–Carbon tetrachloride	1.56	1.97	0.0160	0.82	4.57	-0.0066	4.47	298.15	F	9
Acetonitrile–Carbon tetrachloride	1.45	1.98	0.0160	0.79	4.98	-0.0066	5.02	303.15	F	8
Acetonitrile–Carbon tetrachloride	1.75	2.10	0.0160	0.65	4.74	-0.0066	4.64	308.15	F	9
Acetonitrile–Carbon tetrachloride	1.78	2.16	0.0160	0.54	5.59	-0.0066	5.48	313.15	F	10
Acetonitrile–Carbon tetrachloride	1.86	2.22	0.0160	0.61	5.68	-0.0066	5.58	318.15	F	9
Dichloromethane–Carbon disulfide	3.21	2.97	0.0290	0.27	4.31	0.0304	3.04	293.15	H	8
Dichloromethane–Carbon disulfide	3.76	3.48	0.0290	0.20	4.06	0.0304	2.80	298.15	H	9
Dichloromethane–Carbon disulfide	3.97	3.69	0.0290	0.55	4.69	0.0304	3.15	303.15	H	10
Dichloromethane–Carbon disulfide	3.76	3.47	0.0290	0.46	4.54	0.0304	3.32	308.15	H	10
Overall AAD%	2.64	2.06		0.50	3.70		2.10			

Under Ref. column, A: Meissner and Michaels (1949); B: Shipp (1970); C: Schmidt et al. (1966); D: Lam and Benson (1970); E: Luengo et al. (1988); F: Teixeira et al. (1992); G: Evans and Clever (1964); H: Aracil et al. (1989).

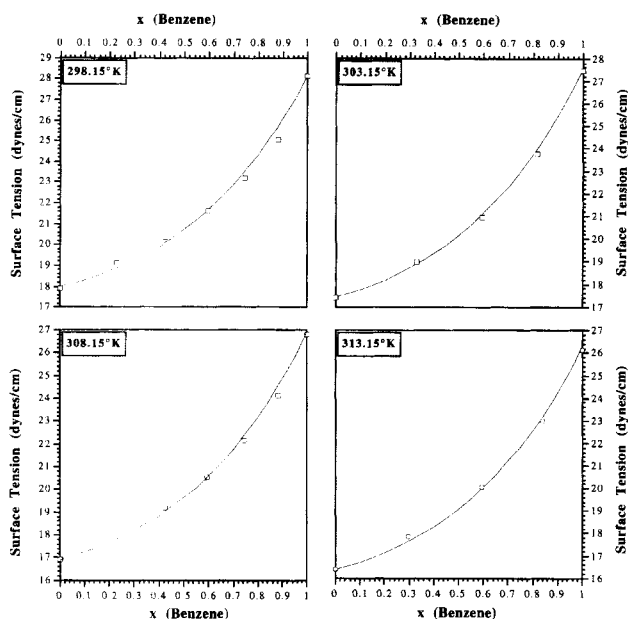


Figure 1. Surface tension, σ , vs. mole fraction of benzene in the liquid mixture for the system benzene-*n*-hexane.

The squares indicate the experimental data (Schmidt et al., 1966) and the solid line represents the values calculated with Eqs. 4 and 16.

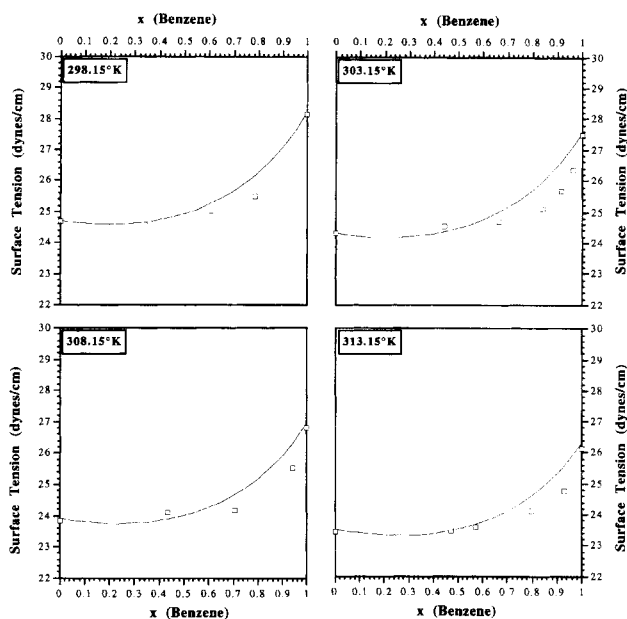


Figure 2. Surface tension, σ , vs. mole fraction of benzene in the liquid mixture for the system benzene-*n*-dodecane.

The squares indicate the experimental data (Schmidt et al., 1966) and the solid line represents the values calculated with Eqs. 4 and 16.

surface tension for the 55 binary mixtures can be predicted within an overall 2.06 AAD%. It may also be noticed that even when m_{ij} is set equal to zero the surface tension for most binary mixtures can be predicted with reasonable accuracy. This represents an improvement over (case 1) as shown in Table 2. In a different calculation for case 2, the binary interaction parameters, m_{ij} , were fitted to all binary mixtures. The best value for this parameter is also reported in Table 2. This interaction parameter is small for all the systems investigated. Note also that when this optimized interaction parameter was used the surface tension of all 55 binary mixtures could be predicted within an overall 0.50 AAD%. Figures 1 through 9 show the results obtained for case 2 when the best value for the binary interaction parameter is used in the prediction of surface tension for the binary systems. Note the excellent agreement with the experimental data.

Case 3

The AAD% obtained when the binary interaction parameter (m_{ij}) was set equal to zero and the parameters \mathcal{P}_0 were predicted using the corresponding states Eq. 3 is reported in Table 2. Note that the surface tension for the 55 binary mixtures could be predicted within an overall 3.70 AAD%. It must be pointed out that by setting the binary interaction parameters equal to zero the surface tension is purely predicted since the m_{ij} adjustable parameter is eliminated. Note that predictions thus made are in good agreement with the experimental data except in a few cases where Eq. 3 failed to yield good estimates for the parameter \mathcal{P}_0 . In another set of calculations for case 3 the binary interaction parameter (m_{ij})

was fitted to the experimental data. The best values for this parameter are also reported in Table 2. Note that when this optimized interaction parameter was used the surface tension

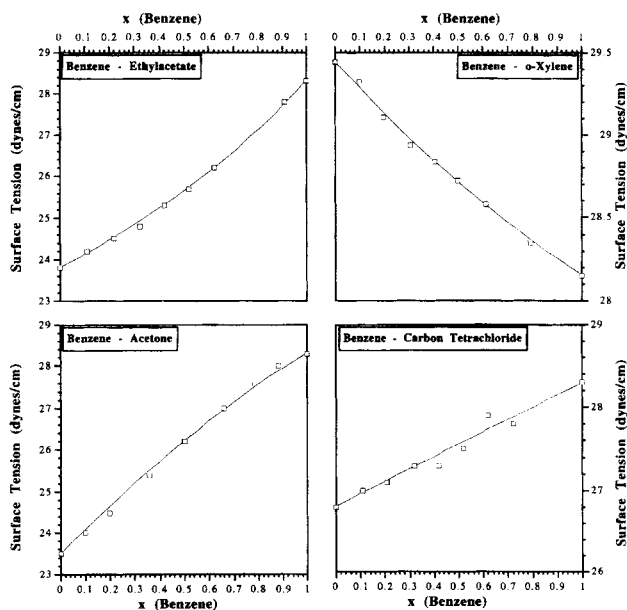


Figure 3. Surface tension, σ , vs. mole fraction of benzene in the liquid mixture for various systems.

The squares indicate the experimental data (Shipp, 1970). Data for the system benzene-*o*-xylene was taken from Lam and Benson (1970). The solid line represents the values calculated with Eqs. 4 and 16.

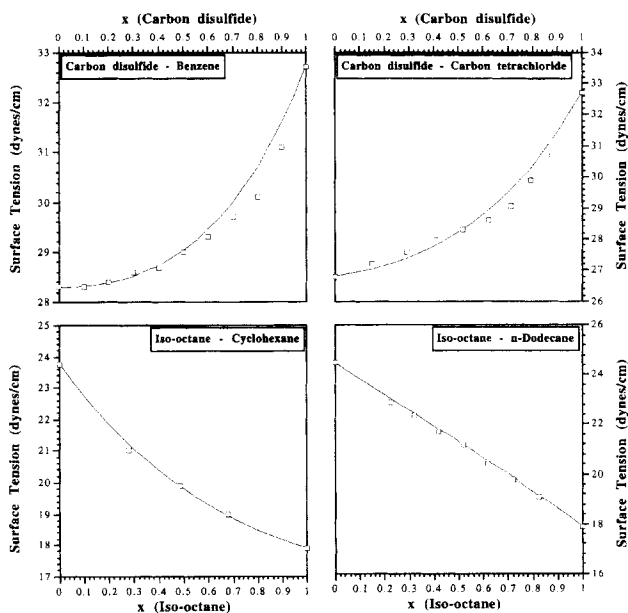


Figure 4. Surface tension, σ , vs. mole fraction for various liquid mixtures.

The squares represent the experimental data. For the systems with isooctane data are from Evans and Clever (1964); the experimental data for the mixture with carbon disulfide are from Shipp (1970). The solid line represents the values calculated with Eqs. 4 and 16.

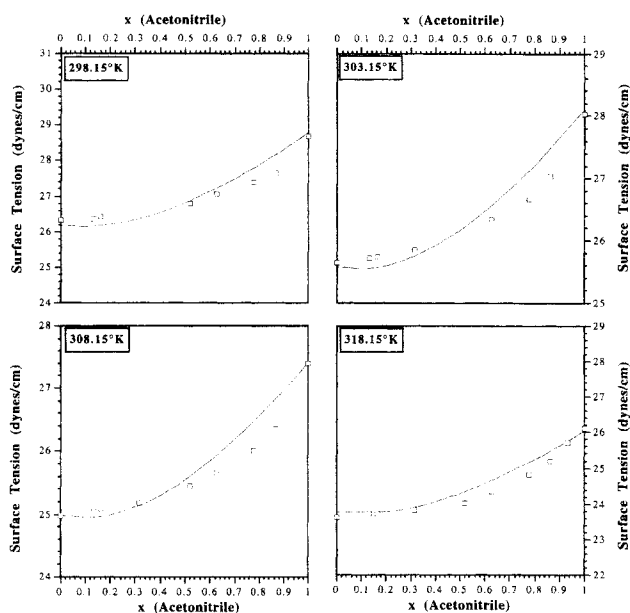


Figure 6. Surface tension, σ , vs. mole fraction of acetonitrile in the liquid mixture of acetonitrile and carbon tetrachloride at various temperatures.

The squares indicate the experimental data (Teixeira et al., 1992). The solid line represents the values calculated with Eqs. 4 and 16.

of the 55 binary mixtures could be predicted within an overall 2.10 AAD%.

In the absence of surface-tension data for pure com-

pounds, Eqs. 3, 4, and 14 (case 3) represent a new tool to predict the surface tension of mixtures of organic compounds. Good predictions will be obtained even when the binary interaction parameter, m_{ij} , is set equal to zero.

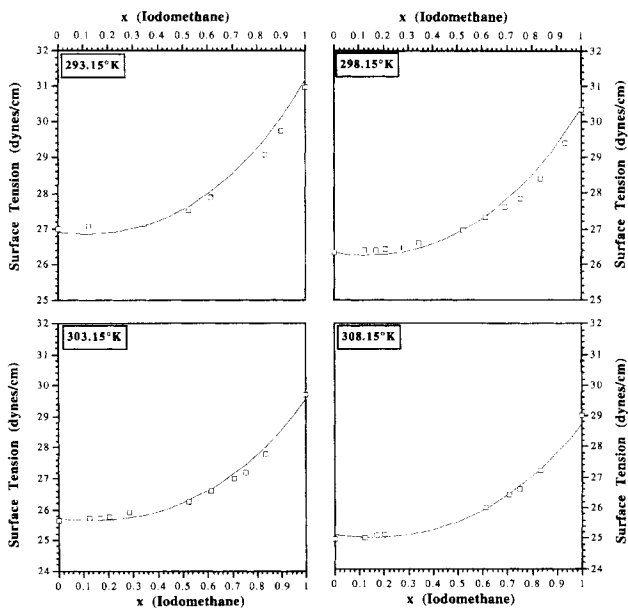


Figure 5. Surface tension, σ , vs. mole fraction of iodomethane in liquid mixture of iodomethane and carbon tetrachloride at various temperatures.

The squares indicate the experimental data (Teixeira et al., 1992). The solid line represents the values calculated with Eqs. 4 and 16.

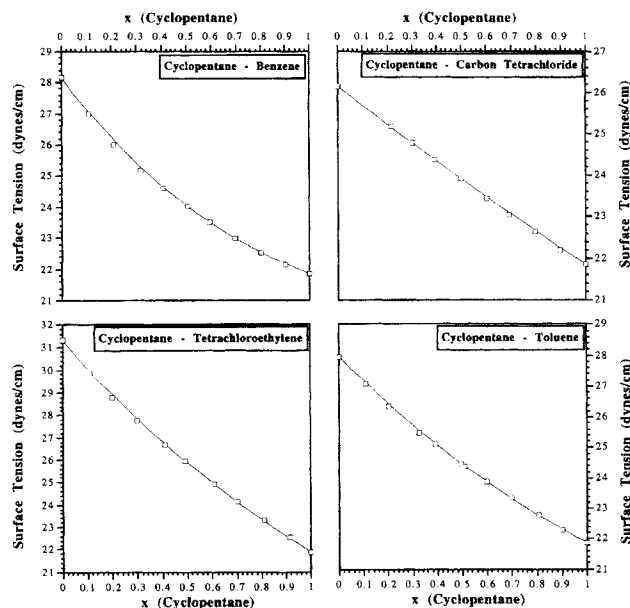


Figure 7. Surface tension, σ , vs. mole fraction of cyclopentane in the liquid mixture for various systems.

The squares indicate the experimental data (Lam and Benson, 1970). The solid line represents the values calculated with Eqs. 4 and 16.

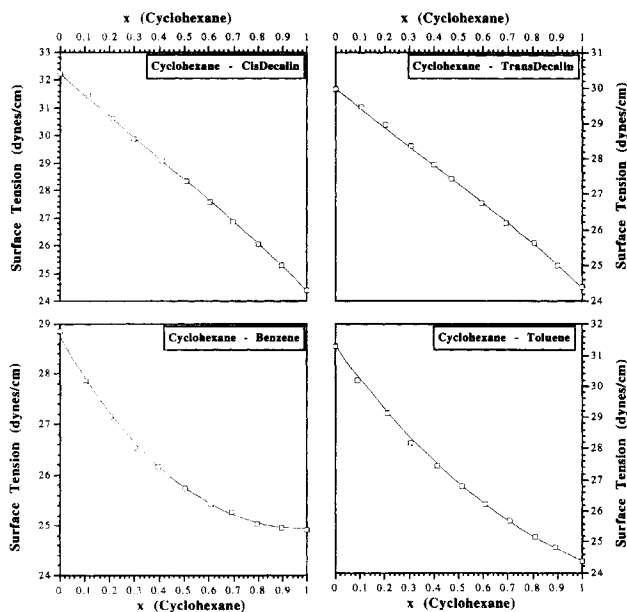


Figure 8. Surface tension, σ , vs. mole fraction of cyclohexane in the liquid mixture for various systems.

The squares represent the experimental data (Lam and Benson, 1970). The solid line represents the values calculated with Eqs. 4 and 16.

Conclusions

Based on the 55 sets of binary-mixture surface-tension data analyzed in this work we may conclude that the expressions

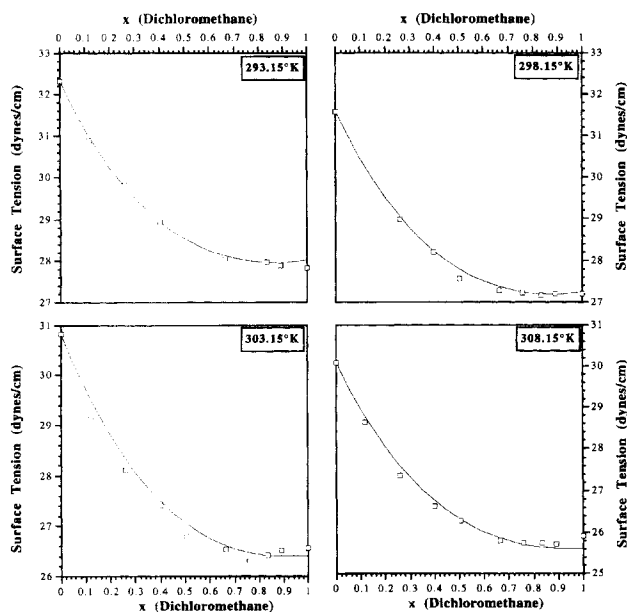


Figure 9. Surface tension, σ , vs. mole fraction of dichloromethane in the liquid mixture of dichloromethane and carbon disulfide at various temperatures.

The squares indicate the experimental data (Aracil et al., 1989). The solid line represents the values calculated with Eqs. 4 and 16.

proposed in this work for surface-tension prediction of mixtures are very good. These predictions are made using only the values of the temperature-independent parameter Φ_0 for the pure components in the mixture. This parameter may be obtained from experimental surface tensions of the pure components or estimated using the corresponding states Eq. 3. It is also worth noting that in these calculations only one adjustable parameter, the binary interaction parameter m_{ij} appearing in Eq. 15, has been used.

A number of other methods exist for predicting surface tension of liquid mixtures. None of the other methods are as accurate in predicting mixture surface tension except those of Carey et al. (1980) and Winterfeld et al. (1978). The latter two methods report very accurate prediction of surface tension of mixtures provided pure fluid surface-tension data are available.

The expressions proposed in this article are general since they have been applied to a variety of binary mixtures and the results obtained are in good agreement with the experimental data. Application of the present method to multicomponent mixtures is straightforward. However, little data are available for multicomponent surface tensions for reliable comparisons.

Acknowledgments

The authors would like to thank Mr. A. R. Fazlali for re-checking some of the calculations reported in this article. This research is supported in part by the NSF grant CTS-9108595 and in part by the IMP/PEMEX contract 2-5-37261.

Literature Cited

- Aracil, J., G. Luengo, B. S. Almeida, M. M. Telo da Gama, R. G. Rubio, and M. Diaz Peña, "Surface Properties of Mixtures of Molecular Fluids. An Experimental and Theoretical Study of $\text{CS}_2 + \text{CH}_2\text{Cl}_2$ and $\text{CS}_2 + \text{CCl}_4$," *J. Phys. Chem.*, **93**, 3210 (1989).
- Carey, B. S., L. E. Scriven, and H. T. Davis, "Semiempirical Theory of Surface Tension of Binary Systems," *AIChE J.*, **26**, 705 (1980).
- Chapela, G. A., G. Saville, and J. S. Rowlinson, "Computer Simulation of a Gas-Liquid Surface," *J. Chem. Soc. Faraday Trans. II*, **73**, 1133 (1977).
- Croton, C. A., *Liquid State Physics—A Statistical Mechanical Introduction*, Cambridge Univ. Press, Cambridge, 141–189 (1974).
- Croton, C. A., *Fluid Interfacial Phenomena*, Wiley, New York (1986).
- Deam, J. R., and R. N. Maddox, "Interfacial Tensions in Hydrocarbon Systems," *J. Chem. Eng. Data*, **15**, 216 (1970).
- Escobedo, J., and G. A. Mansoori, "Surface Tension Prediction for Pure Fluids," *AIChE J.*, **42**, 1425 (1996).
- Escobedo, J., "Flow Behavior of Heavy Organic Particles Contained in Crude Oils," PhD Diss., Univ. of Illinois, Chicago (1995).
- Evans, H. B., Jr., and H. L. Clever, "Surface Tensions of Binary Mixtures of Isooctane with Benzene, Cyclohexane, and n-Dodecane at 30°," *J. Phys. Chem.*, **68**, 3433 (1964).
- Gambill, W. R., "Surface and Interfacial Tensions," *Chem. Eng.*, 143 (1958).
- Gao, G., "A Simple Correlation to Evaluate Binary Interaction Parameters of the Peng-Robinson Equation of State," *Fluid Phase Equil.*, **74**, 85 (1992).
- Hall, K. R., ed., *TRC Thermodynamic Table—Hydrocarbons*, Thermodynamic Research Center, Texas A&M Univ. (1986).
- Kwak, T. Y., and G. A. Mansoori, "Van der Waals Mixing Rules for Cubic Equations of State—Applications for Supercritical Fluid Extraction Modelling," *Chem. Eng. Sci.*, **41**, 1303 (1986).
- Lam, V. T., and G. C. Benson, "Surface Tensions of Binary Liquid Systems: I. Mixtures of Nonelectrolytes," *Can. J. Chem.*, **48**, 3773 (1970).

- Luengo, G., J. Aracil, R. G. Rubio, and M. Diaz Peña, "Bulk and Surface Thermodynamic Properties in Mixtures of Small Rigid Molecules: The $\text{CCl}_4 + \text{CS}_2$ System," *J. Phys. Chem.*, **92**, 228 (1988).
- Massih, A. R., and G. A. Mansoori, "Conformal Solution Theory of Polar Fluids," *Fluid Phase Equil.*, **10**, 57 (1983).
- Massoudi, R., and A. D. King, "Effect of Pressure on the Surface Tension of n-Hexane," *J. Phys. Chem.*, **79**, 1676 (1975).
- Riazi, M. R., and G. A. Mansoori, "Simple Equation of State Accurately Predicts Hydrocarbon Densities," *Oil and Gas J.*, 108 (1993).
- Schmidt, R. L., J. C. Randall, and H. L. Clever, "The Surface Tension and Density of Binary Hydrocarbon Mixtures: Benzene-n-Hexane and Benzene-n-Dodecane," *J. Phys. Chem.*, **70**, 3912 (1966).
- Shipp, W. E., "Surface Tension of Binary Mixtures of Several Organic Liquids at 25°C," *J. Chem. Eng. Data*, **15**, 308 (1970).
- Teixeira, P. I. C., B. S. Almeida, M. M. Telo da Gama, J. A. Rueda, and R. G. Rubio, "Interfacial Properties of Mixtures of Molecular Fluids. Comparison Between Theory and Experiment: $\text{CH}_3\text{I} + \text{CCl}_4$ and $\text{CH}_3\text{CN} + \text{CCl}_4$," *J. Phys. Chem.*, **96**, 8488 (1992).
- Weinaug, C. F., and D. L. Katz, "Surface Tensions of Methane Propane-Mixtures," *Ind. Eng. Chem.*, **35**, 239 (1943).
- Wertheim, M. S., "Correlations in the Liquid-Vapor Interface," *J. Phys. Chem.*, **65**, 2377 (1976).
- Winterfield, P. H., L. E. Scriven, and H. T. Davis, "An Approximate Theory of Interfacial Tension of Multicomponent Systems: Application Binary Liquid-Vapor Tensions," *AIChE J.*, **24**, 1010 (1978).

Manuscript received Feb. 19, 1998.
